


# PROJECTOR LAMPS

## CLASS A I TUBULAR PROJECTOR


These are suitable for use in Spotlights, such as Pattern 53, the concentrated filament giving greater optical efficiency and approximately 25 per cent. more light than Class B. The lamp may not be tilted, but must be burnt vertical cap down. Approximate life 100 hours.

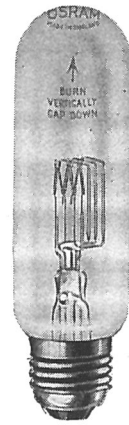

Voltage	Watts	Maximum Dimensions			Type of Filament	Area of Filament	Cap	PRICE each
		Overall Length	Diam.	Filament Centre to Cap Contact				
100 and 110	100	m/m	m/m	m/m	Grid	m/m	B.C. or E.S.	£ s. d. 0 10 9
	250	134	32	75	"	10 x 9	E.S.	1 0 0
	500	134	64	75	"	11 x 10	E.S. or G.E.S.	<del>1 5 0</del>
	1000	134	64	75	"	13 x 16	G.E.S.	<del>1 12 0</del>
		240	64	120	"	16 x 15	G.E.S.	1-4-0 1-10-0
200 to 260	100	134	32	75	Grid	8 x 13	B.C. or E.S.	0 10 9
	250	134	64	75	"	11 x 13	E.S.	<del>1 1 0</del>
	500	134	64	75	"	15 x 18	E.S. or G.E.S.	<del>1 5 0</del>
	1000	240	64	120	"	15 x 23	G.E.S.	<del>1 12 0</del>
								1-0-0 1-4-0 1-10-0

## CINEMA STUDIO CLASS

This lamp, which is used in the Patterns 52A and B, may be used at any angle except within 45° of vertical, cap upwards. Approximate life 100 hours.



Voltage	Watts	Maximum Dimensions			Type of Filament	Area of Filament	Cap	PRICE each
		Overall Length	Diam.	Filament Centre to Cap Contact				
100-110 } 200-260 }	2000	m/m	m/m	m/m	Grid	m/m	G.E.S.	£ s. d. 4 5 0
		220	150	135		23 x 20		

Pre-focus cap, if fitted to the 500, 1000 and 2000 watt Lamps, 2s. 6d. extra.

THE ABOVE PRICES ARE SUBJECT TO E.L.M.A. FLUCTUATIONS

**STRAND ELECTRIC**  
**AND ENGINEERING CO., LTD.**

Telephone : Temple Bar 7464 (6 lines). Telegraphic Address : Spotlite, Rand, London.

**FLORAL STREET, COVENT GARDEN, W.C.2**