

6pack & 3pack




Strand Dimming Systems

6pack 6 x 10A Digital Dimmer 3pack 3 x 25A Digital Dimmer


PROVISIONAL DATA SHEET

Features


- MCB (SPN) protection for each channel
- Wide range of socket options including Dual UK 15A, Schuko, French, CEE17, CEE17 (32A connector, 5kW load) and hardwired
- Suitable for portable, rack-mount and wall-mount operation (wall brackets included)
- Single or three phase operation
- Fully digital control electronics
- DMX In/Out
- Simple Set up using front panel keypad and LED display
- DMX fail hold function
- DMX termination switch
- Selectable Minimum Level for each dimmer
- Local on/off test buttons
- DMX addressing with individual patching for all dimmers
- Simple slide-out service access
- Fan free convection cooling for quiet operation

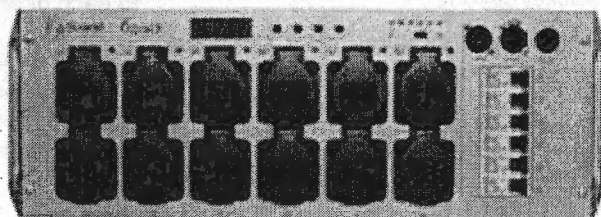


6pack Dual Schuko

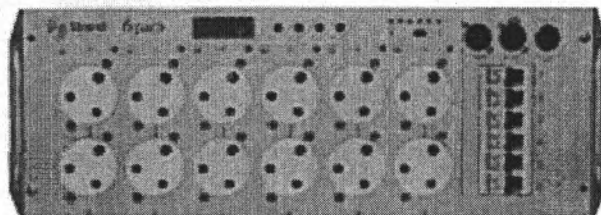

6pack Dual 15A

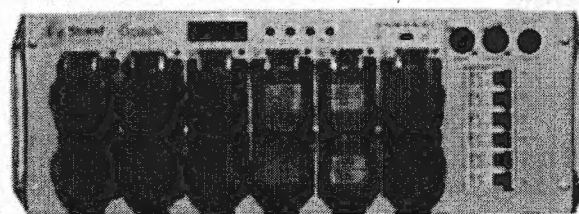

6pack Dual 16A

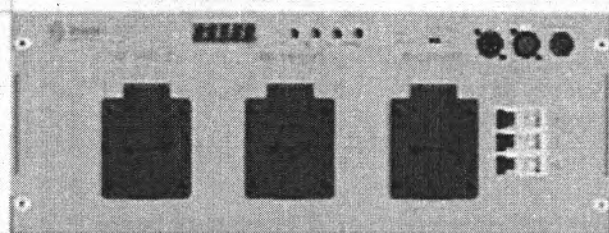

3pack 3 x CEE17

Applications

Schools, theatres, multi-purpose rooms, churches, function rooms, museums, public spaces, temporary installations, house lighting, touring (rental)

6pack & 3pack



Strand Dimming Systems

Description

Ideal for use in small to medium size installations, rental applications and for portable use.

The 6pack and 3pack are a family of cost effective, flexible digital dimmer packs with a wide range of features and socket options.


The 6pack features 110µs chokes (3pack 140µs).

The simple control interface enables users to set DMX address, minimum /maximum levels and dimmer curves channel by channel.

Three dimmer curves including linear, non-dim and square may be assigned to each dimmer

Each channel is protected by a magnetic circuit breaker and rated at 10 Amps (2.3kW) for 6pack; 25A (5kW) for 3pack. All racks are convection cooled for quiet operation.

The sliding electronics tray gives easy service access even after installation.

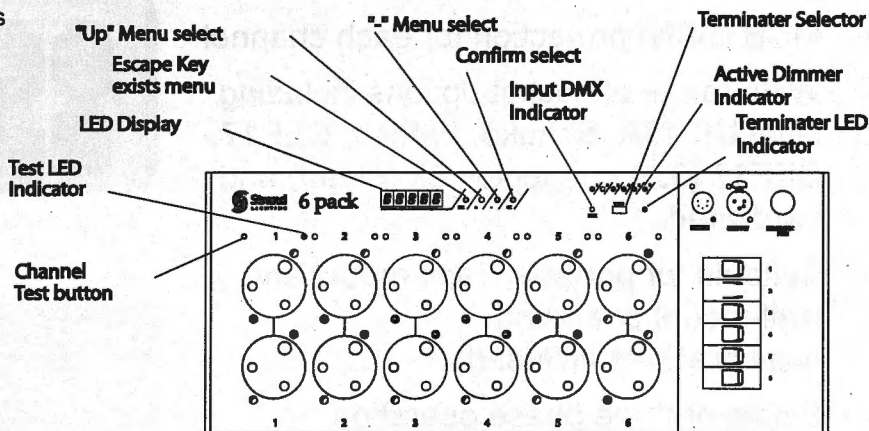

Technical Specifications

Supply Voltage 230/240V 3 phase up to 60A

Standards Compliance

EMC emissions to EN50081-1, EN55014;
EMC immunity to EN50082-1, IEC1000-2-2;

Safety:

EN60950, EN60439 Part 1 (also part 12 BS5486);
design & build: ISO9000, UL1950

The rack shall be CE marked

PROVISIONAL
DATA SHEET

Mechanical Data

Construction rigid folded sheet steel

Weight 6pack: 14kg
3pack: 14kg

Dimensions (HxWxD) 6pack: 178x483x250mm
3pack: 178x483x250mm

DMX Inputs single DMX In/Thru

Environmental Data

Operating Temperature 0 - 37° C
Humidity Range 0 - 95% non condensing
Ingress Protection IP30

Ordering Information

Cat No	Description
75301	6pack 6x10A Hardwired
75302	6pack 6x10A Dual 15A
75303	6pack 6x10A Dual Schuko
75304	6pack 6x10A Dual CEE17
75305	6pack 6x10A Dual French
Special Order	6pack 6x10A Dual Swiss
75300	3pack 3x25A CEE17

Strand Lighting Limited
Mitchelston Industrial Estate,
Kirkcaldy, Fife, KY1 3LY
United Kingdom
Tel: +44 (0)1592 656400
Fax: +44 (0)1592 653528

Strand Lighting Italia srl
Via delle Gardenie 33
00040 Pomezia-Roma, Italy
Tel: +39 06 919631
Fax: +39 06 9147136

Strand Lighting Asia
20/F Delta House, 3 On Yiu Street
Shatin, N.T. Hong Kong
Tel: + 852 2757 3033
Fax: + 852 2757 1767

Strand Lighting Limited
Unit 3, Hammersmith Studios,
Yeldham Road, London, W6 8JF
United Kingdom
Tel: +44 (0)1592 656400
Fax: +44 (0)20 8735 9799

Strand Lighting GmbH
Kurfürstendamm 70
10709 Berlin, Germany
Tel: +49 30 707 9510
Fax: +49 30 707 95199



The Company reserves the right to make any variation in design or construction to the equipment described. E&OE
© Strand Lighting Ltd 2005
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.

www.strandlighting.com

BERLIN • HONG KONG • LONDON • LOS ANGELES • NEW YORK • ROME • TORONTO
BD 080905