



FLUORESCENT FLOOD


The Astral Fluorescent Flood uses the PL Fluorescent lamp which provides a well controlled beam of "cool" light with a high colour rendering index. Ideal for display lighting, dioramas etc. Can be dimmed. Constructed of injection moulded rynite plastic and aluminium extrusions. The Astral Fluorescent Flood offers efficiency, strength and performance.

FEATURES


- Smooth and well controlled light output.
- Energy efficient source available in 36 watt or 55 watt.
- Lamps available in a choice of colour temperatures.
- 36 watt uses copper wound ballast or electronic ballast.
- 55 watt electronic ballast only.
- Designed for use with colour filters with a choice of several hundred colours.
- Can be fitted with universal three circuit track adapter.
- All aluminium extrusion and plastic injection moulding construction.
- Fully tested and Compliant to CE standards.

PHOTOMETRIC DATA

Fluorescent tests conducted with PL fluorescent lamp, 36w, 240v

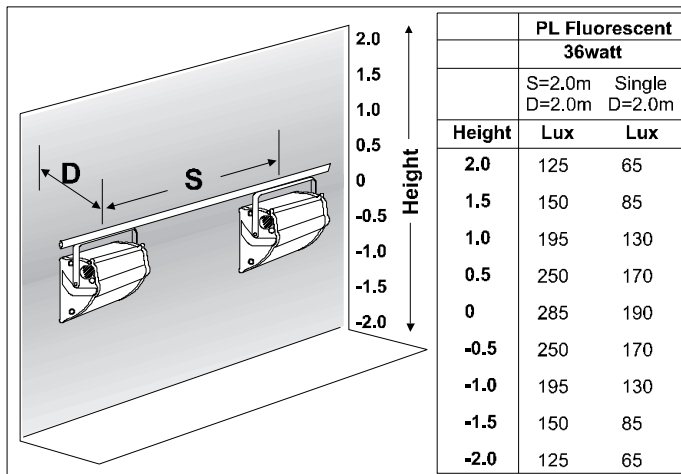

PHYSICAL DATA

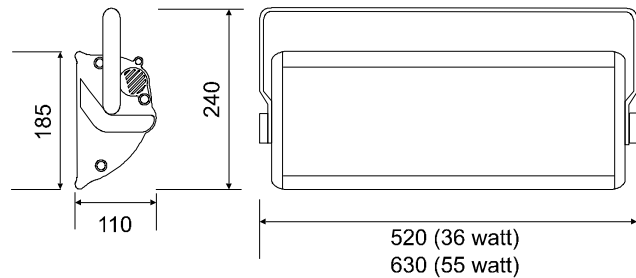

Weight: 36 watt: 3.3 Kg

55 watt: 4Kg

Included: Instruction sheet

ORDER CODES & ACCESSORIES

- Astral Flood 36w Fluorescent Black SA-AFLDPL36B
- Astral Flood 36w Fluorescent White SA-AFLDPL36W
- Astral Flood 36w Fluorescent Grey SA-AFLDPL36G
- Astral Flood 55w Fluorescent Black SA-AFLDPL55B
- Astral Flood 55w Fluorescent White SA-AFLDPL55W
- Astral Flood 55w Fluorescent Grey SA-AFLDPL55G
- Universal 3 Circuit track adapter - black SAA - TRAB
- Universal 3 Circuit track adapter - white SAA - TRAW

NOTE: If you are planning to use your Astral Flood with a colour cassette, please specify so at time of order, as they are NOT retro-fittable.

Your Selecon Distributor