



GROUNDROW

The Aurora Groundrow is a 625w, 1000w or 1250w asymmetric cyclorama luminaire for larger theatres and studios. The Aurora Groundrow provides a visually even wash of light from a floor position.




FEATURES


- Light beam is very smooth and falls off evenly without visible high lights or shadows
- Repeatability of beam characteristics is guaranteed by the extruded aluminium reflector
- Robust construction from a combination of aluminium extrusions and formed steel panels
- Filter life is maximised by the dual air-flow chamber construction
- Filter frame size ensures an economic two frame cut out of a standard filter sheet.
- The filter frame is flat ensuring it can be mounted into the luminaire with ease
- Adjustable rubber feet isolate the luminaire from vibration and provide tilt adjustment.
- Single unit has side hinges for onsite assembly as battens.
- Relamp without removing the colour filter holder.
- Available configurations: Single, 4 way Linear. Choice of multi connectors.
- Compliant to CE standards

PHOTOMETRIC DATA

Tests conducted using a standard 1250w, 240v, 189mm P2/12 lamp.

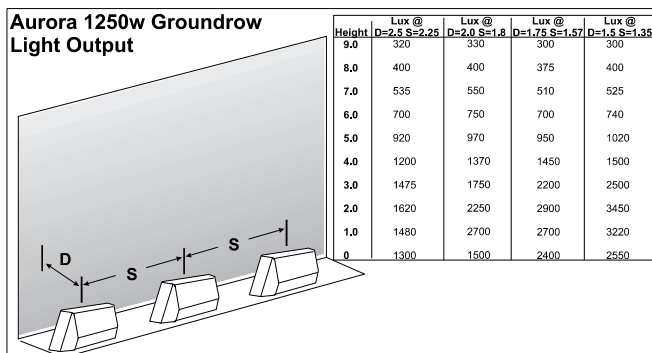

PHYSICAL DATA

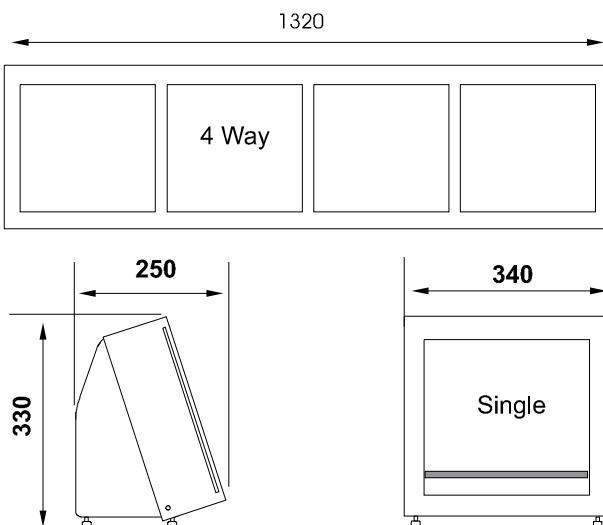

Weight: Single 7kg, 4 Way 28kg

Colour frame size: 305mm x 315mm

Included: 1 x colour frame for single, instruction sheet

ORDER CODES & ACCESSORIES

- Aurora Groundrow Single 10AUGRD
 - Aurora Groundrow 4 way linear (cable tails) 10AUGRD4
 - Aurora Groundrow 4 way linear (weiland conn.) 10AUGRD4W
 - Aurora Groundrow 4 way linear (socapex conn) 10AUGRD4S
- Your Selecon Distributor