



## P.C.

General purpose P.C. for theatre and display lighting. The well defined beam of light, with a crisper edge than a Fresnel, can easily be blended with adjacent beams to provide even illumination. A fully featured 500/650w luminaire constructed of pressure die-castings and aluminium extrusion. The Acclaim P.C. offers efficiency, strength and performance using a 110mm diameter lens..

### FEATURES


- Up to 50% more light output than comparative PCs.
- Wide range of beam angle from 4 to 64 degrees.
- Adjustable yoke balance point.
- Light texturing on rear of lens to obscure filament imaging retains the characteristic P.C. clarity of beam.
- 'Swing-down' door for easy access to lamp. Isolates the mains supply when opened.
- Captive lamp/ reflector focus system moves on brass bearing provides smooth focus movement.
- Rear grab handle, doubles as handy cable storage.
- Fully tested and compliant to CE standards.

### PHOTOMETRIC DATA


Tests conducted using a standard T27, 650w, 240v, 15,000 lumens lamp - average lamp life: 600 hours.

Beam angles:

Spot 4° 75,000cd Flood 64° 5,750cd  
Field: 7° 70°

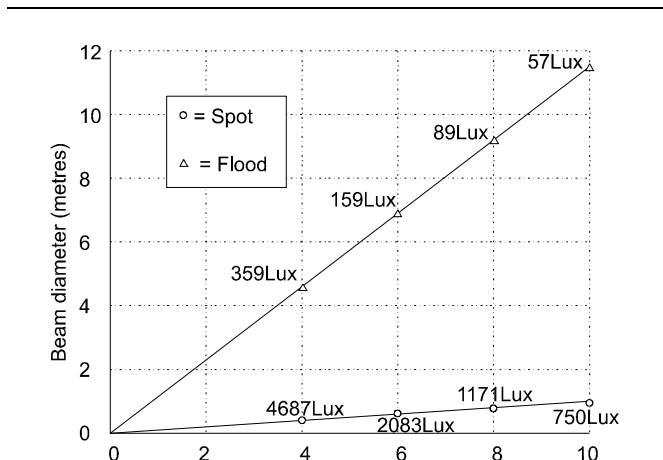

### PHYSICAL DATA

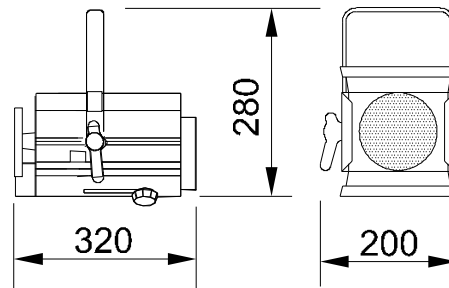

Weight: 3.3 Kg  
Packed Weight: 3.7Kg  
Carton Size: 460 x 225 x 175  
Carton Size Cubic: 0.018

Colour Frame Size: 125mm x 125mm

Included: 1 x colour frame, 1 x M10 nut & bolt set, instruction sheet.

### ORDER CODES & ACCESSORIES

Acclaim P.C.	12ACPCMS
Barndoor	20BDMF
Lens Safety Mesh	15ACSM
Suspension Hookclamp	20HC
Safety Bond	20SC

Your Selecon Distributor